


REMARKS

Accompanying this Preliminary Amendment, please find a substitute specification which overcomes the informalities noted in the original specification. The undersigned avers that the enclosed substitute specification only includes the changes which are indicated on the enclosed marked-up copy of the original specification and does not contain any new subject matter.

Newly entered claims 12-22 merely rewrite the subject matter of original claims 1-11 in a more traditional U.S. claim format. The entered amendments are not, in any way, directed at distinguishing the present invention from any known prior art. Please consider the newly entered claims upon consideration of this application.

In the event that there are any fee deficiencies or additional fees are payable, please charge the same or credit any overpayment to our Deposit Account (Account No. 04-0213).

Respectfully submitted,

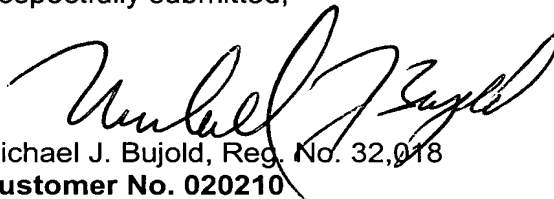

Michael J. Bujold, Reg. No. 32,018

Customer No. 020210

Davis & Bujold, P.L.L.C.

Fourth Floor

500 North Commercial Street

Manchester NH 03101-1151

Telephone 603-624-9220

Facsimile 603-624-9229

E-mail: patent@davisandbujold.com



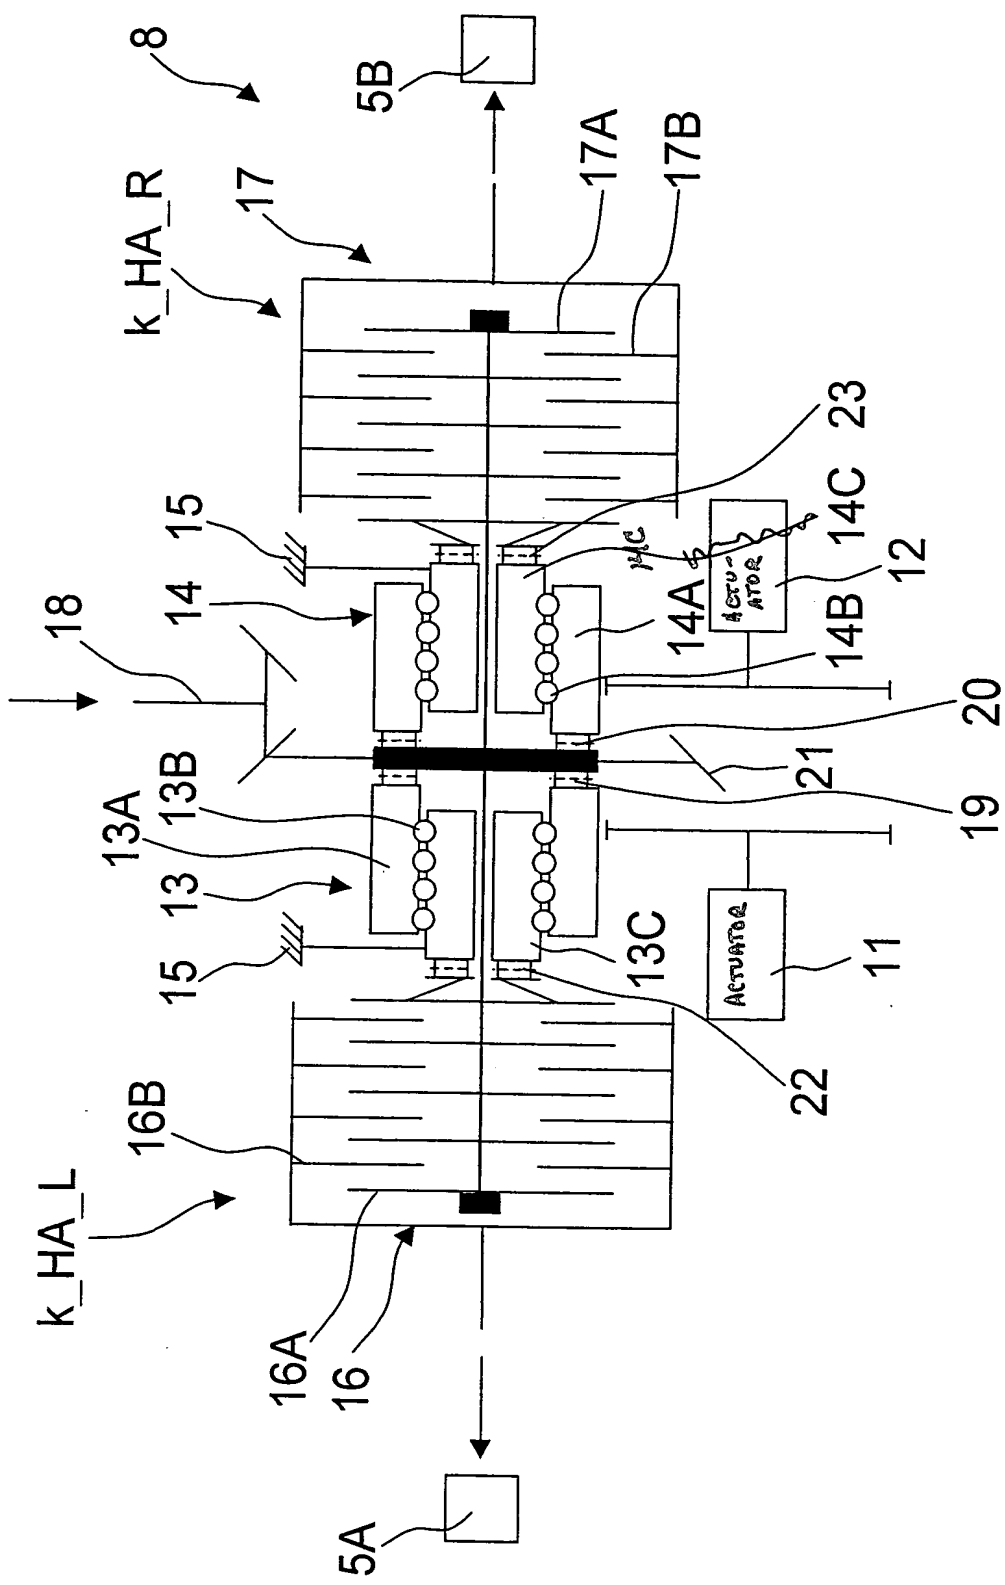


Fig. 4

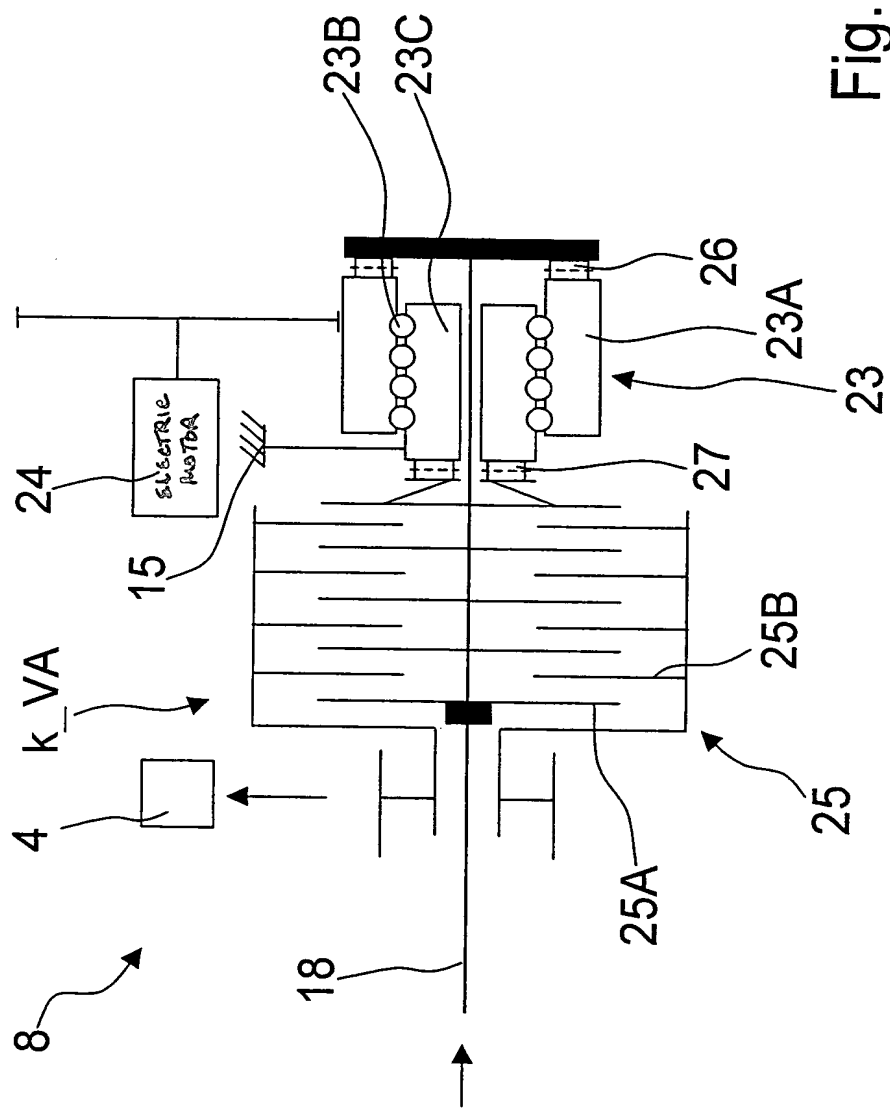


Fig. 5

differentials provide a broader possibility of distributing the torque asymmetrically than the longitudinal differentials. In the meantime, the rack and pinion differentials produce a standard transverse compensation for the vehicle and the worm gear differentials offer both a longitudinal distribution and a transverse distribution of the transmission output torque from the power train.

[009] With the aid of such transmission distributors, it is possible to divide the power train torque between multiple axles in almost any given proportion, without generating excessive loads to the power train. In addition, with the input from the compensating transmission, the wheels of an axle can be driven with different rotational speeds, independent between each other and, depending on the different path lengths of the left and right lanes, whereby the driving torque is distributed among both driven wheels symmetrically and free of parasite torque.

[010] The established torque distribution between the front and rear axles can be from 50% : 50% to 33% : 66%. In rack and pinion differentials, the torque distribution is fixed at 50% : 50%. By selecting one of these fixed torque proportions between front and rear axles, the driving force distribution is ideal for only one design point.

[011] Consequently, the driving torque is not distributed proportionally among the corresponding axle loads, which depend on the instantaneous driving conditions. If the traction reserves must be used completely in case of high slippage, in theory it is only possible to brake or block the variable torque distribution between the front and rear axles of an automobile with a longitudinal differential. The vehicle handling would not be negatively influenced by a continuously incipient blocking effect with an increasing rotational speed difference, such a viscous blocker, and a consistent development of loads in the power train can be avoided when positive fitting barriers arise.

[012] The so-called clutch controlled, all-wheel drives are increasingly common, in which the clutch is carried out with external adjustable clutch torques, for example, multiple disk clutches. The clutch torque can be selected depending on the instantaneous driving conditions. It is then possible to customize the instantaneous axial load distribution between the front and rear axles, depending

on the dynamic axial load conditions, which also depend on the acceleration, slope, vehicle load, etc.

[013] Further hybrid forms are also known, such as the so called differential and clutch controlled systems, where the all-wheel drive is carried out by an electronically switchable, multiple, disk clutch and/or a lockable differential.

[014] It is unfavorable, however, that a variable torque distribution is reached in a power train by a slippery drive operation, which has in consequence an adverse effect on the efficiency degree of such a power train.

[015] Therefore, the invention under consideration is based on the power train requirements and in a system for controlling and adjusting a power train, where a simple, customized and efficient optimized distribution of the driving torque is feasible.

[016] ~~———— The invention can solve this problem with a power train according to the attributes of Patent Application 1, and a system for controlling and adjusting a power train according to the attributes of Patent Application 8.~~

[017] SUMMARY OF THE INVENTION

[018] With the power train involved by the invention, an all-wheel drive vehicle with at least two driven axles and a main transmission between the main engine and the driven axles, which generates different conversions with three control and adjustment frictional clutches, where a first clutch is located between the main transmission and a first driven axle. A second and third clutch, each are located between the axle transmission downstream. The main transmission and a driven wheel of the second vehicle axle, where the forward transferring capability of the clutch is respectively adjustable by an actuator, and the driving torque of the main engine can be distributed both lengthwise between the driven vehicle axles as well as in the transverse direction in one of the vehicle axles depending on the variable forward transferring capability of the clutch.

[019] A beneficial possibility exists whereby the driving torque of the power train's main engine can be distributed in the output driving torque of the main transmission, respectively, depending on the operating conditions of the power

train in such a way that in critical driving situations, a vehicle equipped with the invention defined power train is provided with a safety optimized driving performance.

[020] In addition, with the invention defined power train exists the possibility that respectively one of the clutches makes a synchronized variable distribution of the driving torque lengthwise between the driven vehicle axles and in the transverse direction between two driven wheels. Meanwhile the two other clutches are slip operated.

[021] Thereby, it can be accomplished that the power dissipation of a vehicle's clutch controlled all-wheel transmission is carried out in two clutches, while the third clutch is operated without losses in a synchronous condition.

[022] The corresponding arrangement of the second clutch and the third clutch between the axle's transmission and each of the driven wheels of the two vehicle axles, makes it possible to improve the demand controlled transverse distribution of the existing driving torque from the power train in the two vehicle axles, whereby the driving behavior of a vehicle can simply work against deteriorated operating conditions, while the agility can be improved as well as the driving stability, for example while driving on curves.

[023] With the defined system for controlling and adjusting the power train of an all-wheel drive vehicle, the transfer capability of the three clutches for distributing the driving torque, between the driven vehicle axles, is adjusted in such a way that one clutch will operate in a synchronous condition, while the two other clutches slip operate, improving the degree of efficiency of the power train in a simple way. Therefore, the transfer capability of the clutches operates slipping between an upper limit value and a lower limit value in which a synchronous condition of both clutches can be varied. Hereby the operating torque is distributed in a user defined proportion. This is a lengthwise distribution ratio of the driving torque between 0% and 100% between the driven vehicle axles, demand controlled and efficiently optimized.

[024] In addition, the portion of the driving torque is applied to the two vehicle axles in a defined ratio. This means that a driving torque transverse distribution

ratio between 0% and 100%, among the driven wheels of the two vehicle axles, can be controlled depending on the demand and its efficiency level can be optimized.

[025] Furthermore, according to the invention for controlling and adjusting the power train, exists the possibility of operating one of the three clutches in a slip free condition. The other two clutches can be operated with one of the needed power output distributions and low differential rotational speeds, by which the power losses can be favorably reduced, leading to an improved efficiency degree of the power train.

[026] In addition, the drive operation of a vehicle equipped with the invention related power train is also favorably guaranteed when two of the three clutches show a functional deficiency.

[027] ~~————~~ BRIEF DESCRIPTION OF THE DRAWINGS

~~[028] ————— Other advantages and benefits of the invention arise from the patent application and the drawing references listed below which describe in principle the following operating examples. It is shown on~~

[028] The invention will now be described, by way of example, with reference to the accompanying drawings in which:

[029] FIG. 1 is a strong schematic representation of a power train in an all-wheel drive vehicle;

[030] FIG. 2 is a graphical representation of the connection between the transfer capability of a first clutch, a second and a third clutch of the power train, according to FIG. 1, and a longitudinal distribution degree of the driving moment between the vehicle axles driven by the power train;

[031] FIG. 3 is a further graphical representation of the connection between the transfer capability of the second clutch and the third clutch of the power train, according to FIG. 1, and a transverse distribution degree of the driving torque between the driven wheels of the two vehicle axles;

[032] FIG. 4 represents a part of the actuators for adjusting the transfer capability of the second clutch and the third clutch from FIG. 1; and

[033] FIG. 5 represents a part of the actuators for adjusting the transfer capability of the first clutch from FIG. 1.

[034] DETAILED DESCRIPTION OF THE INVENTION



[035] FIG. 1 shows a schematic representation of a power train 1 of an all-wheel drive vehicle. Power train 1 comprises a driving unit 2 and a main transmission 3, each of which in practice is a known transmission. The driving unit 2 is represented in the application example of FIG. 1 as a braking force machine and can be built from an electric motor for a beneficial further training.

[036] Between the main transmission 3, which is intended for showing different conversion ratios, and a first driven vehicle axle 4, which in a known way can be connected with at least one driven wheel 4A, 4B, is a first clutch k_{VA} arranged in a longitudinal power train. The first clutch k_{VA} is between the main transmission 3 and a mechanism 6 which balances through differential rotational speeds and is placed between the driven wheels 4A and 4B, the first vehicle axle 4, whereby the mechanism 6 is used as a known transverse distributing transmission.

[037] Beyond this, a second clutch k_{HA_L} as well as a third clutch k_{HA_R} are located in transverse transfer boxes q_{HA_L} and q_{HA_R} , between an axle transmission 7 over which one of two driven vehicle axles 5 routes part of the driving torque of the braking machine 2 in a mechanism where two driven wheels 5A, 5B of the second vehicle axle 5 and each one of the vehicle wheels 5A, 5B of the two vehicle axles 5 are routable.

[038] It is possible to power the driven wheels 4A and 4B of the first vehicle axle 4 independently from each other, depending on the different distances covered over the right and left lanes with variable rotational speeds over the transverse transfer box 6, whereby the driving torque can be symmetrically and consequently free of parasite torques distributed between the driven wheels 4A and 4B of the first vehicle axle 4.

[039] In contrast, the transverse distribution of the applied portions of the driving torque over the second vehicle axle 5 is carried out by the variable adjustable

transfer capability of both clutches k_{HA_L} and k_{HA_R} , whereby preferably each one of both clutches k_{HA_L} and k_{HA_R} will be operated in synchronous conditions, and the other k_{HA_L} and k_{HA_R} clutches will be run slipping. Thereby, the transverse distribution ratio of the applied driving torque portions to the second vehicle axle 5, from 0% to 100% based on the feasibility of either driven wheels 5A or 5B, will depend on the transfer capability of the slip operating clutches k_{HA_L} and/or k_{HA_R} of the second vehicle axle 5.

[040] Thereby the transverse distribution ratio of the control of the second clutch k_{HA_L} and the third clutch k_{HA_R} is associated in such a way that the entire fraction of the driving torque, which is applied to the second vehicle axle 5, is 100% transferred to the driven wheels 5A or 5B, then added to the synchronized operated clutches k_{HA_L} and/or k_{HA_R} when each of the other k_{HA_L} and/or k_{HA_R} clutches are driven by the transverse distributor q_{HA_L} and q_{HA_R} with one of such reduced transfer capabilities so that no driving torque is transferred to these clutches.

[041] The three clutches k_{VA} , k_{HA_L} and k_{HA_R} of the power train 1 are control and adjustment friction engaged multiple disk clutches, whose transfer capability is adjustable with an actuator 8, shown in FIG. 4 and FIG. 5, which is placed in the output side of the transmission output and is simply schematically displayed and located in an illustrated distributing transmission 9. With these three clutches k_{VA} , k_{HA_L} and k_{HA_R} , it is possible to distribute the driving torque from main engine 2 as well as the variable and demand controlled transmission output torque from main transmission 3 between the two driven vehicle axles 4, 5.

[042] The control of the three clutches k_{VA} , k_{HA_L} and k_{HA_R} , as well as the resulting variable distribution of the adjacent lengthwise driving torque from both vehicle axles 4 and 5, is clearly explained on FIG. 2. The previously-described transverse distribution of the two driving torque fractions applied in the direction of the two vehicle's axles 5 from both driven wheels 5A and 5B on the second vehicle axle 5 will be further described in more detail in FIG. 3.

[043] FIG. 2 illustrates three strong schematic stages, of which a first stage gk_{VA} of a stage of the transfer capability of the first clutch k_{VA} is shown

between a lower limit value $W(u)$ and an upper limit value $W(o)$. A further stage $[[gk_HA]]$ gk_HA_L , gk_HA_R shows the stage of the transfer capability of the second clutch k_HA_L or of the third clutch k_HA_R , which corresponds to the gk_VA transfer capability of the first clutch k_VA . A third stage lvt graphically displays the driving torque distribution lengthwise between both vehicle axles 4 and 5, whereby the first vehicle axle 4 corresponds to the front axle (VA) and the second vehicle axle 5 corresponds to the rear axle (HA) of an all-wheel vehicle.

[044] On Point I of the diagram according to FIG. 2, in which the transfer capability of the first clutch k_VA corresponds to the lower limit value $W(u)$. Basically, no rotational torque will be transferred over the first clutch k_VA . At the same time, the transfer capability of the second clutch k_HA_L or the transfer capability of the third clutch k_HA_R correspond to the upper limit value (W_o), on which the second clutch k_HA_L or the transfer capability of the third clutch k_HA_R operate in a synchronous condition. There is no slippage between the two clutch halves of the second clutch k_HA_L and the third clutch k_HA_R . In this operating condition, the clutches k_VA and k_HA_L and/or k_VA_R distribute the entire driving torque from the main engine 2 between the rear axle and the second vehicle axle 5, while the lengthwise distribution ratio obtained from the first vehicle axle 4 is zero.

[045] The basic principle for controlling the three clutches k_VA , k_HA_L and k_HA_R of the power train 1 is that over the entire operating range of the power train, each of the three clutches k_VA , k_HA_L and k_HA_R are run in synchronous condition, while the other clutches k_HA_R and k_HA_L or k_HA_R or k_VA operate slipping, and the driving torque lengthwise distribution ratio lvt , between the two vehicle axles 4 and 5, is regulated by the demand between 0% and 5%.

[046] The entire graphical illustration of the transfer capability of the second clutch k_HA_L and the third clutch k_HA_R , shown in FIG. 2, therefore, can be selected. As with an open first clutch k_VA in a synchronous condition, the driving torque from the braking force machine 2 is completely applied to the second vehicle axle 5 by each of the two clutches k_HA_L and k_HA_R . The driving

torque will be completely applied by an opened first clutch k_{VA} and the synchronously operated second clutch k_{HA_L} or the third clutch k_{HA_R} , independently from the adjusted transfer capability of the third clutch k_{HA_R} or the second clutch k_{HA_L} , controlled by the second vehicle axle 5. A transfer capability variation of the second clutch k_{HA_L} or the third clutch k_{HA_R} , while the third clutch k_{HA_R} or the second clutch k_{HA_L} operate synchronously, are simply applied to a transverse distribution ratio variation q_{vt} , shown in FIG. 3, wherefore from this functionality was first introduced in the description of FIG. 3.

[047] It can be further inferred from FIG. 2 that the transfer capability of the second clutch k_{HA_L} is controlled and adjusted in such a way that in the range between Point I and a second Point II of the diagram, shown in FIG. 2, indicates that the second clutch k_{HA_L} remains in the synchronous condition. In this context, the transfer capability of the third clutch k_{HA_R} is basically not varied for the lengthwise distribution ratio l_{vt} stage of the driving torque and can be varied for adjusting a desired transverse distribution ratio q_{vt} of the second vehicle axle 5 applied fraction of the driving torque on the second vehicle axle 5 between the lower limit value $W(u)$ and the upper limit value $W(o)$, without adjusting another value for the lengthwise distribution ratio l_{vt} . The lengthwise distribution ratio l_{vt} will be displayed initially only by the variation of the transfer capability of the first clutch k_{VA} , which is graphically displayed in FIG. 2, on the gk_{VA} stage of the transfer capability of the first clutch k_{VA} .

[048] The transfer capability of the first clutch k_{VA} is transferred between the first Points I and II from its lower limit value $W(u)$, with which the first clutch k_{VA} transfers no rotational torque, varying the transfer capability in the direction of the upper limit value $W(o)$, by which the first clutch k_{VA} , likewise, is found in its synchronous condition. This means that the transfer capability of the first clutch k_{VA} is continuously raised in the range between Point I and Point II. This has the consequence that the lengthwise distribution ratio l_{vt} of the driving torque varies between both the vehicle axles 4 and 5, with which the rising transfer capability of the first clutch k_{VA} , an increasing fraction of the driving torque is applied in the direction of the front vehicle axle 4.

- [049] With the existing operating condition of the power train 1, that corresponds to Point II of the diagram, according to FIG. 2, and in which both the first clutch k_{VA} and the second clutch k_{HA_L} are found in synchronous condition, exists a defined driving torque distribution ratio between the vehicle axles 4 and 5.
- [050] The transfer capability of the first clutch k_{VA} is controlled and adjusted within an area between Point II and Point III of the diagrams, according to FIG. 2, so that the first clutch k_{VA} is kept in its synchronized condition. At the same time, the transfer capability of the second clutch k_{HA_L} is continuously reduced, moving away from the upper limit value $W(o)$ on which the second clutch k_{HA_L} is in a synchronized condition, in the direction of the lower limit value $W(u)$, with which the second clutch k_{HA_L} basically transfers no more rotational torque in the direction of the lower vehicle axle 5.
- [051] As can be inferred from FIG. 2, the lengthwise driving torque distribution ratio lvt of the stage rises between the vehicle axles 4 and 5 with an increasing reduction of the second clutch k_{HA_L} transfer capability up to the maximum value in Point III, on which the driving torque is completely, i.e., to 100%, transferred to the front axle 4, whereby the transfer capability of the third clutch k_{HA_R} is also adjusted in Point III to the lower limit value $W(u)$.
- [052] This means that the value range of the lengthwise distribution ratio lvt , which lies between Points II and III of the diagram according to FIG. 2, is therefore adjustable, so that the first clutch k_{VA} is operated in a synchronous condition and the second clutch k_{HA_L} and the third clutch k_{HA_R} simultaneously are operated slipping. The driving torque is applied up to 100% on the first vehicle axle 4, when the second clutch k_{HA_L} and the third clutch k_{HA_R} transfer no more rotational torque.
- [053] By way of the described operating way, it is possible to control the driving torque from the braking machine 2 and the transmission output torque from the main transmission 3 through the three control and adjustment clutches k_{VA} , k_{HA_L} and k_{HA_R} , distributing it continuously and optimizing the efficiency factor between the vehicle axles 4 and 5. With both clutches k_{HA_L} and k_{HA_R} on the second vehicle axle 5, it is feasible to

achieve a demand controlled, continuous and efficient degree optimized transverse distribution of the driving torque fractions applied on the second vehicle axle 5, between the two driven wheels 5A and 5B of the second vehicle axle 5.

[054] An improvement of the efficiency factor of the power train 1 can be reached by applying the invention defined approach for controlling and adjusting the three clutches, as one of the three clutches k_{VA} , k_{HA_L} and k_{HA_R} is always operated without slipping, while the other two clutches are operated with one of the operating conditions that depend on the required power distribution in the power train with their corresponding rotational speeds. By way of this operating strategy, the friction losses are minimized with all the fractions of a clutch controlled all-wheel operation.

[055] In addition, the favorable possibility exists that by applying the three control and adjustment clutches k_{VA} , k_{HA_L} and k_{HA_R} in the distribution transmission 9, the main transmission 3 can be actuated without a separate starting element, for example, a hydrodynamic torque converter or a frictionally engaged starter clutch, or that a starter element must be integrated in the power drive as an additional constructive element, as either the first clutch k_{VA} , the second clutch k_{HA_L} and/or the third clutch k_{HA_R} or all three clutches can transfer that function to another starter element.

[056] If the main transmission 3 is arranged as a continuous transmission with a chain variator, for example, there is the favorable possibility of adjusting the existing variator on the vehicle to its starting transfer setting, when the clutches k_{VA} , k_{HA_L} and k_{HA_R} are opened and detached from the main transmission 3.

[057] Furthermore, an optimal influence over the driving dynamics, the traction and the stability is ensured by applying the invention defined power train and system with the three clutches k_{VA} , k_{HA_L} and k_{HA_R} , while the power train 1 has also a lower weight in comparison with other known solutions in practice.

[058] FIG. 3 shows three schematized stages, whereof a first stage gk_{HA_L} , a stage of the transfer capability of the second clutch k_{HA_L} is shown between a lower limit value $W(u)$ and a higher limit value $W(o)$. A further stage gk_{HA_R}

shows the stage of the transfer capability of the third clutch k_{HA_R} , to which corresponds the gk_{HA_L} stage of the second clutch k_{HA_L} . A third stage qvt graphically shows the stage of a transversal distribution ratio of the driving torque portions applied to the second vehicle axle 5 between both driven wheels 5A and 5B of the second vehicle axle 5.

[059] In Point IV of the diagrams according to FIG. 3, in which the transfer capability of the second clutch k_{HA_L} corresponds to the lower limit value $W(u)$, will basically transfer no rotational torque over the third clutch k_{HA_R} . At the same time, the transfer capability of the second clutch k_{HA_L} is set on the upper limit value $W(o)$, on which the second clutch k_{HA_L} is found in a synchronous condition and no slipping develops between the two clutch halves of the second clutch k_{HA_L} .

[060] In this operating condition, the clutches k_{HA_L} and k_{HA_R} will apply the corresponding fraction of the driving torque from the main engine 2 to the driven wheel 5A of the second vehicle axle 5, whereas no rotational torque is applied over the third clutch k_{HA_R} from the second driven wheel 5B of the second vehicle axle 5.

[061] In the region between Point IV and Point V of the diagram, according to FIG. 3, the transfer capability of the first clutch k_{HA_L} k_{VA} is controlled and adjusted in such a way that the first clutch k_{HA_L} k_{VA} is kept in its synchronous position. At the same time, the transfer capability of the third clutch k_{HA_R} is found on its lower limit value $W(u)$, in which no rotational torque is transferred in the direction of the upper limit value $W(o)$ while the transfer capability is varied, and the third clutch is also found on its synchronous condition. ◆◆

[062] This means that the transfer capability of the third clutch k_{HA_R} is consistently increased in the range between Point IV and Point V. The consequence of this is that the distribution ratio of the applied portion of the driving torque to the two driven wheels 5A and 5B of the second vehicle axle 5 changes with the increasing transfer capability of the third clutch k_{HA_R} . An increasing fraction of the applied driving torque fraction to the second vehicle axle 5 is transferred to the second driven wheel 5B of the second vehicle axle 5.

[063] When the operating conditions of power train 1 lie within the area of the second vehicle axle 5, Point V of the diagram, according to FIG. 3, corresponds to the second clutch k_{HA_L} and the third clutch k_{HA_R} when they are found in their synchronous condition. So the driving torque applied to the second vehicle axle 5 is distributed in equal parts between the two driven wheels 5A and 5B of the second vehicle axle 5. This transversal distribution qvt of the driving torque is adjusted while the vehicle is operated on even roads and without a noticeable slipping value in the range of the driven wheels 5A and 5B of the second vehicle axle 5, whereby a beneficial reduction of the power losses in the power train is reached in the region of the second clutch k_{HA_L} and the third clutch k_{HA_R} in a simple way.

[064] In the area between Point V and Point VI of the diagram, according to FIG. 3, the transfer capability of the third clutch k_{HA_R} is controlled and adjusted, so that the third clutch k_{HA_R} can be kept in its synchronized condition. At the same time, the transfer capability of the second clutch k_{HA_L} constantly moves away from the upper limit value $W(o)$ of the transfer capability, in which the second clutch k_{HA_L} is synchronized, reducing in the direction of the lower limit value $W(u)$, in which the second clutch k_{HA_L} basically transfers no more rotational torque in the direction of the first driven wheel 5A of the second vehicle axle 5.

[065] As it can be inferred from FIG. 3, the qvt stage increases the transversal distribution ratio of the applied portions of the driving torque to the second vehicle axle 5 with an increasing reduction of the transfer capability of the second clutch k_{HA_L} up to their maximum value in Point VI, on which the driving torque applied portion to the second vehicle axle 5 is completely transferred to the second driven wheel 5B of the second vehicle axle 5.

[066] An improvement of the efficiency factor of the power train 1 can be reached in the range of the second vehicle axle 5 through the described invention defined system for controlling and adjusting the second or third clutches k_{VA} , k_{VA_L} , as one of the two clutches k_{HA_L} or k_{HA_R} are continuously driven without slipping, while the other clutches k_{HA_R} and/or k_{HA_L} one of the operating situations depending on the engine output distribution in the power train 1 within

the range of the second vehicle axle 5, which will be operated with the corresponding differential rotational speeds. By way of this operating strategy, the friction losses are minimized with all the portions of a clutch controlled all-wheel transmission within the range of the vehicle axles.

[067] The second clutch k_{HA_L} and the third clutch k_{HA_R} are only operated slipping at the same time when the first clutch k_{VA} is operated for setting a desired lengthwise distribution ratio lvt in their synchronous condition as it was described in the operating way, shown in FIG. 2.

[068] It can be inferred from FIG. 4 and FIG. 5 and partially from FIG. 1 in a simple schematic illustration that actuator 8 controls and adjusts the three clutches k_{VA} , k_{HA_L} and k_{HA_R} , whereby the portion shown in FIG. 4 of actuator 8 activates the second clutch k_{HA_L} and the third clutch k_{HA_R} by way of two actuators 11 and 12. Each of actuators 11 and 12 activate two ball winding drives 13 and 14 for deploying the second clutch k_{HA_L} and the third clutch k_{HA_R} .

[069] The control of actuators 11 and 12 is coupled, with each other in such a way that each can activate the second clutch k_{HA_L} or the third clutch k_{HA_R} by activating the third clutch k_{HA_R} and/or the second clutch k_{HA_L} , respectively, as well as by activating the corresponding first clutch k_{VA} . The activation of the second clutch k_{HA_L} and the third clutch k_{HA_R} is done without varying the transversal distribution ratio qvt in such a way that the transfer capability of the second clutch k_{HA_L} or of the third clutch k_{HA_R} is varied, while the transfer capability of the third clutch k_{HA_R} and of the second clutch k_{HA_L} are kept constant in a single value, particularly when the second clutch k_{HA_L} and the third clutch k_{HA_R} are working in a synchronized condition.

[070] At the same time, naturally exists the possibility that the transferring capability of the second clutch k_{HA_L} and of the third coupling k_{HA_R} can be adjusted for varying the lengthwise distribution ratio lvt in such a way that the second clutch k_{HA_L} and the third clutch k_{HA_R} can be synchronously operated while the first clutch k_{VA} is operated slipping at the same time.

[071] The actuator 8 is built with an electric motor with which the second clutch k_HA_L and the third clutch k_HA_R can activate the actuators 11 and 12, whose rotating drive movement is not convertible by way of the ball winding drives 13 and 14 of the torque converter device in a linear actuation movement for the second clutch k_HA_L and the third clutch k_HA_R. The ball winding drives 13 and 14 are carried out, respectively, by nuts 13A and 14A, with the ball winders 13B, 14B, as well as with the spindles 13C and 14C. Thereby the nuts 13A and 14A fasten an electric motor 24 which drives actuators 11, 12 in a rotary movement in the axial direction. As long as the nuts 13A and 14A remain in functional connection with the ball winders 13B and 14B and with the spindles 13C and 14C. The spindles 13C and 14C of the ball winding drives 13 and 14 are torque proof, connected in such a way with a housing fastened component 15, and displaceable conducted, so that a rotation of each of the nuts 13A and 14A, respectively, one in axial direction of the ball winding drives 13 and 14, controls the translating movement in the axial direction of the ball winding drive spindles 13C and 14C.

[072] The multiple disc clutches existing, respectively, in the second clutch k_HA_L and in the third clutch k_HA_R, which are the multiple disc clutches 16 and 17 depend on the axial position of spindles 13C and 14C of the ball winding drives 13 and 14 to be open or in frictional contact. Thereby the internal discs 16A and 17A of the second clutch k_HA_L and/or of the third clutch k_HA_R are respectively connected with a torque proof drive shaft 18, over which the transmission output torque portion applied to the second vehicle axle 5 from the main transmission 3 on the second clutch k_HA_L and the third clutch k_HA_R are available and torque proof connected. The external discs 16B and/or 17B are also connected with the first driven wheel 5A or with the second driven wheel 5B of the second vehicle axle 5.

[073] Under consideration of the control and adjustment system, described in FIG. 3 for the second clutch k_HA_L and the third clutch k_HA_R is the adjustment of the spindles 13C and 14C of the ball winding drives 13 and 14, depending on the rotational control of the nuts 13A and 14A exerted by the electric motor 11

and 12. This means that the electric motor's 11 and 12 control will depend on the transfer capability of the second clutch k_{HA_L} and the third clutch k_{HA_R} . Thereby the spindles 13C and 14C will move respectively in the direction of the translation movement of disc packets 16 and 17, over with the transfer capability of the second clutch k_{HA_L} and the third clutch k_{HA_R} is increased. The spindle 13C of the first ball winding drive 13 or the spindle 14C of the second ball winding drives 14 move respectively in the direction of the second winding drive 14 or of the first ball winding drive 13, and the transfer capability of the second clutch k_{HA_L} and of the third clutch k_{HA_R} is reduced by lowering the pressing force between the external discs 16B and 17B and the internal discs 16A and 17A.

[074] The two nuts 13A and 14A are supported in the axial direction of the parts of actuator 8, described in FIG. 4, over cylinder rolling bearings 19 and 20 in the axial direction against the drive shaft 18 in functional connection with a conic gear wheel 21. As the disc packets 16 and 17 of the second clutch k_{HA_L} and the third clutch k_{HA_R} are arranged with conic rolling bearings 22 and 23, over which an axial actuating movement is realized over each of the spindles 13C or 14C from the discs packets 16 or 17 from the second clutch k_{HA_L} or the third clutch k_{HA_R} . In addition, the differential rotational speeds between the discs packets 16 and 17 and the spindles 13C and 14C are compensated with almost no losses over the conic roller bearings 22 and 23 in a simple way.

[075] FIG. 5 illustrates a further part of actuator 8, which is foreseen for controlling the first clutch k_{VA} . This part of actuator 8 basically corresponds to the part shown in FIG. 4 of actuator 8, which is used for controlling and adjusting the second clutch k_{HA_L} .

[076] The part of actuator 8, illustrated in FIG. 5, is actuated with a ball winding drive 23 that, in the same way that the ball winding drives 13 and 14 from FIG. 4 work, which is built with a nut 23A, with a ball winder 23B and a spindle 23C. The nut 23A is rotated by an electric motor 24 built an actuator and is fixed in the axial direction of the drive shaft 18. A rotation of the nut 23A causes a translating movement of the torque proof bearing supported the spindle 23C, whereby the

translating displacement of the spindle 23C takes place in the direction of a disc packet 25 of the first clutch k_VA, or by the leftward or rightward rotation motion of the electric motor 24.

[077] The corresponding adjustment of the transfer capability of the first clutch k_VA will transfer over the drive shaft 18 of the existing part of the driving torque over internal discs 25A and external discs 25B of the disc packet 25. From there it will be transferred to the first vehicle axle 4. The rolling bearing supported cylinders 26 and 27, shown in FIG. 5, correspond to the constructive adjustment and to the functionality of the bearing supported cylinders 19 and 22, shown in FIG. 4.

[078] Instead of the described electro magnetic control of the three clutches that the invention defined power train, it can also be foreseen that the three clutches are controlled by a hydraulic actuator, whereby the hydraulic actuator can be adjusted as a separate system or can be integrated in the hydraulic control system of the main transmission.

[079] Furthermore, the possibility also naturally exists that the first clutch can be controlled by an electromechanical system, and the second and third clutches are controlled by a hydraulic system. The further control and adjustment of the three clutches can take place over a combined control system, which includes both electro mechanical and hydraulic components as well.

[080] By a beneficial further development of the invention based articles, it is foreseen that the control of the three clutches will be conducted with piezoelectrical or electromagnetic actuators.

Reference numerals

- 1 power train
- 2 main engine, braking force machine
- 3 main transmission
- 4 first vehicle axle
- 4A, B driven wheels of the first vehicle axle
- 5 second vehicle axle
- 5A, B driven wheels of the second vehicle axle
- 6 transversal distribution transmission
- 7 axial transmission
- 8 actuator
- 9 distribution transmission
- 10 actuator, electric motor
- 11 actuator, electric motor
- 12 first ball winding drive
- 13A nut of the first ball winding drive
- 13B ball winder of the first ball winding drive
- 13C spindle of the first ball winding drive
- 14 second ball winding drive
- 14A nut of the second ball winding drive
- 14B ball winder of the second ball winding drive
- 14C spindle of the second ball winding drive
- 15 constructive elements fastened to the housing
- 16 disc packet of the second clutch
- 16A internal discs of the second clutch
- 16B external discs of the second clutch
- 17 disc packet of the third clutch
- 17A internal discs of the third clutch
- 17B external discs of the third clutch
- 18 drive shaft

19, 20 rolling bearing supported cylinder

21 conic gear wheel



22, 23 further rolling bearing supported cylinder



23A nut



23B ball winder



23C spindle



24 electric motor



25 disc packet



25A internal discs



25B external discs



26, 27 roller bearing support cylinders



k_VA first clutch

k_HA_L second clutch

k_HA_R third clutch

l_VA lengthwise distributor power train for the rear axle

lvt lengthwise distribution ratio

qvt transversal distribution ratio

gk_VA transfer capability stage of the first clutch

gk_HA_L transfer capability stage of the second clutch

gk_HA_R transfer capability stage of the third clutch

q_HA_L transversal distribution power train

q_HA_R transversal distribution power train

W(u) lower limit value of the transfer capability of the clutch

W(o) upper limit value of the transfer capability of the clutch